

WFLW-70-24L

FLW MONO PERC

WAAREE[®]

One with the Sun



Ultra Light Weight



Higher Open Circuit Voltage



Low Series Resistance




Easy & Quick to Install




Easily Mounted with Number of Options



Low System Installation Cost




Superior Low Light & Low Sun Angle Performance

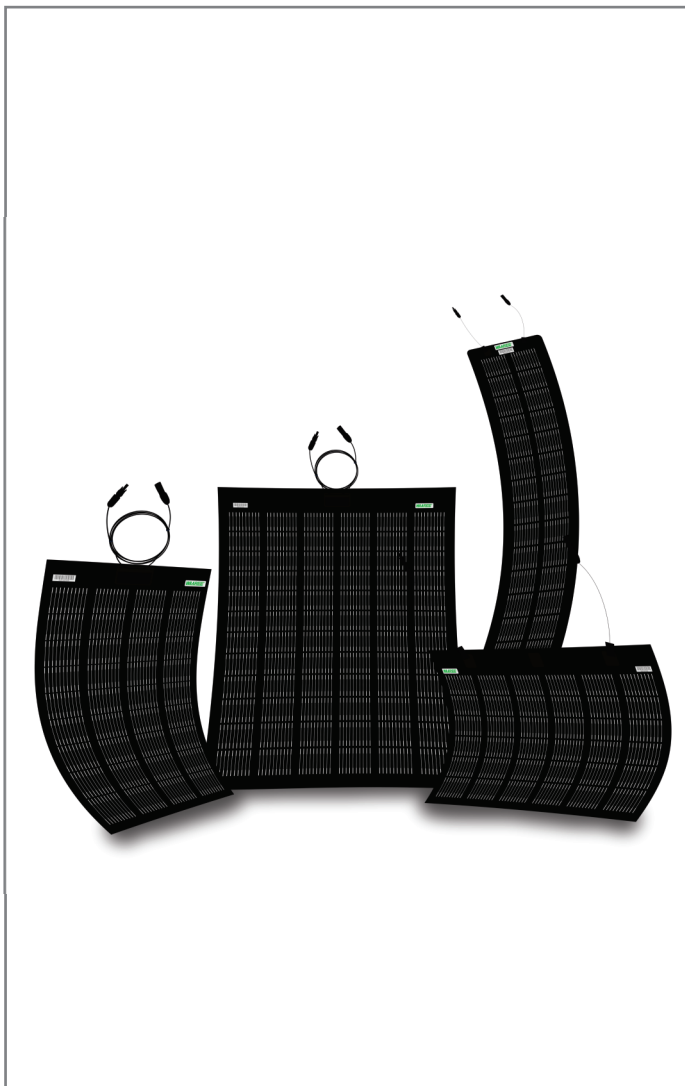

CHARACTERISTICS CURVES

PV module: WFLW-70

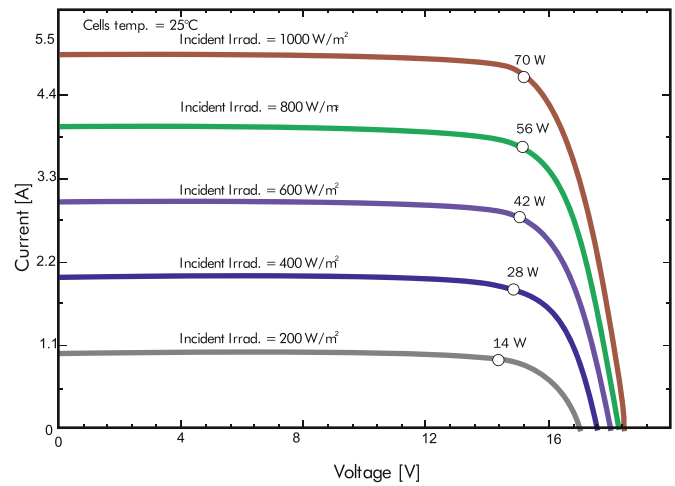

CERTIFICATIONS AND WARRANTY

Fire Safety Class	Class C
Material & Workmanship Warranty	5 Years *
Power Output Warranty	15 Years*

For Non Roofing 2 Years of workmanship and 5 Years on Power output
For roofing 5 Years of workmanship and 15 Years on Power Output

TEMPERATURE COEFFICIENT

TkVoltage	-0.36%/k
Tkcurrent	+0.07%/k
TkPower	-0.38%/K

WFLW-70-24L

FLW MONO PERC

ELECTRICAL PROPERTIES (STC*)

Model Number	WFLW-70-
Rated Power Pmax (Watt)	70
Number of Cell in Series (Nos.)	24
Open Circuit Voltage (Volts)	16.32
Max Peak Voltage Vmp (Volts)	14.16
Max Peak Current Imp (Amps)	4.92
Short Circuit Current Isc (Amps)	5.25
FF (%)	81.3%
Active Area Efficiency (%)	21.1%
Max System Voltage Vdc (Volts)	600
Power Tolerance	±3%
Max Series Fuse Rating (Amps)	20
Operating Temperature	-40°C to +85°C

MECHANICAL PROPERTIES

Cell Type	Mono Perc M-6
Solar Cells Arrangement (Nos)	12X2
Cell Dimensions	83X166 mm HC
Module Dimension (L x W)	1156 X 390 mm
Weight	2.0±0.5 KG
Junction Box IP Rating	IP67 Type
Connector Type	MC4
Superstrate type	ETFE Polymer
Junction Box	Front Side
Laminate Thickness	3
Module Thickness	20
Colour Type	Black or White
Adhesive	Rear side

MODULES DIMENSIONS

