


AHNAY SERIES

Bi-17-380 to Bi-17-400

Framed glass transparent backsheet bifacial module

WAAREE[®]

One with the Sun



Better performance under all climatic conditions



Enhanced power output due to revolutionary design



Split junction box




Reduced power losses up to 1/4 times




PID resistant with long term reliability




Sustain heavy wind & snow loads (2400 pa & 5400 pa)




Full square Mono PERC cells

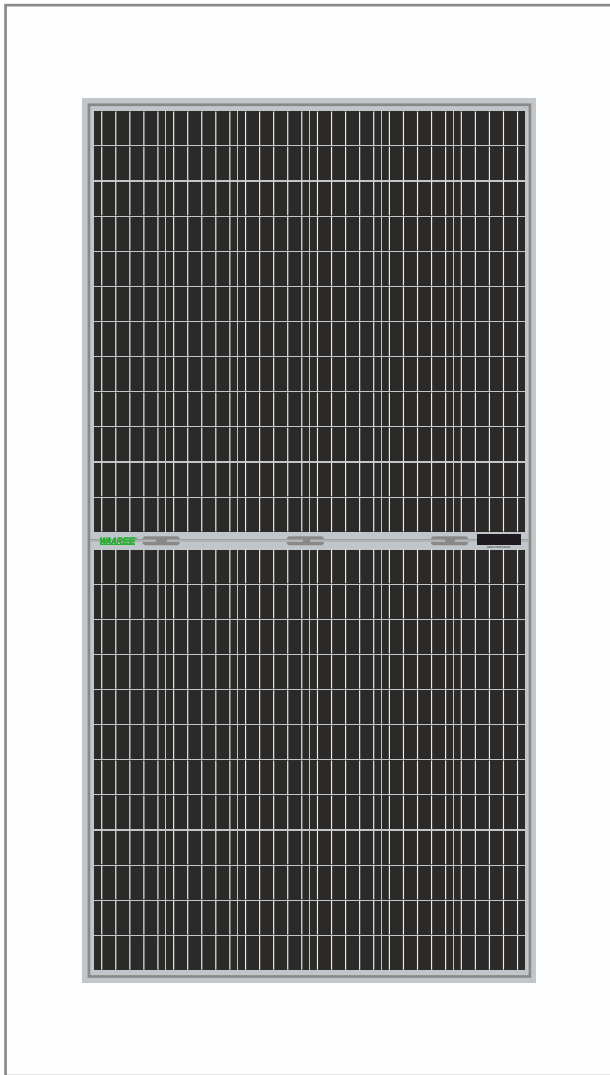

I-V VARIATION WITH IRRADIANCE

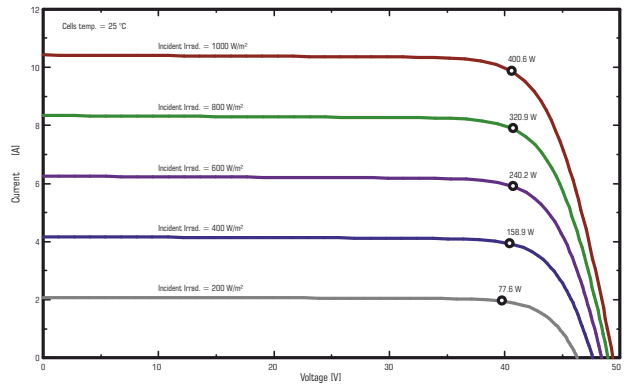

I-V VARIATION WITH TEMPERATURE

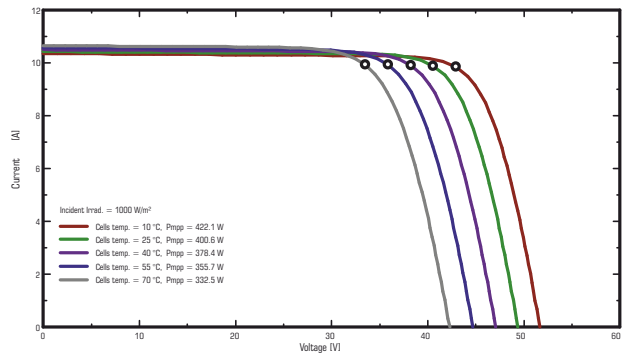


The Graphs are for reference purpose only. Please consult Waaree technical team for further clarifications.

INTERNATIONAL & NATIONAL CERTIFICATIONS

IEC 61215 | IEC 61730 | UL61730



IS 14286/IEC 61215 ed2
IS/IEC 61730(PART1&2)

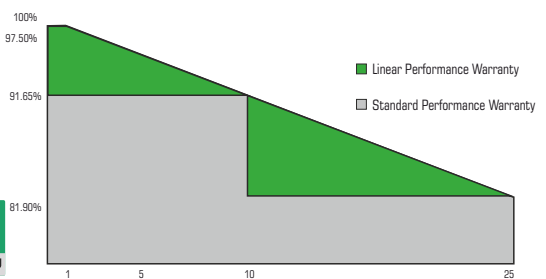

ISO 9001:2015 | ISO 14001:2015 | ISO 45001:2018
Independent assessment of factories by BLACK & VEATCH

AHNAY SERIES

Bi-17-380 to Bi-17-400

Framed glass transparent backsheet bifacial module

WAAREE[®]

One with the Sun

ELECTRICAL CHARACTERISTICS

Models	Pmax (W)		Vmp (V)		Imp (A)		Isc (A)		Voc (V)		Module Eff. (%)
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
Bi-17-380	380	282.7	39.07	36.58	9.75	7.73	10.16	8.21	48.14	44.73	18.60
Bi-17-385	385	286.7	39.32	36.84	9.82	7.78	10.22	8.25	48.45	45.00	18.84
Bi-17-390	390	290.2	39.56	37.06	9.88	7.83	10.29	8.31	48.76	45.29	19.09
Bi-17-395	395	294.1	39.81	37.32	9.95	7.88	10.35	8.36	49.07	45.58	19.33
Bi-17-400	400	297.8	40.07	37.55	10.02	7.93	10.42	8.42	49.39	45.88	19.58


*Standard Test Conditions (STC) - 1000 W/m² irradiance, Air Mass 1.5 and 25°C cell temperature. Nominal Operating Cell Temperature (NOCT) - 800 W/m² irradiance, Air Mass 1.5, Ambient temperature 20°C and Wind speed 1 m/s. Average power reduction of 4.5% at 200 W/m² as per IEC 60904-1. Measuring Uncertainty ± 3%.

System Voltage	1500 V	Series Fuse Rating	25 A
----------------	--------	--------------------	------

BI-FACIAL OUTPUT - BACKSIDE POWER GAIN

		Bi-17-380	Bi-17-385	Bi-17-390	Bi-17-395	Bi-17-400
15%	Power Output (W)	437	443	449	454	460
	Module Efficiency (%)	21.39%	21.67%	21.95%	22.23%	22.51%
20%	Power Output (W)	456	462	468	474	480
	Module Efficiency (%)	22.32%	22.61%	22.91%	23.20%	23.49%
25%	Power Output (W)	475	481	488	494	500
	Module Efficiency (%)	23.25%	23.55%	23.86%	24.17%	24.47%
30%	Power Output (W)	494	501	507	514	520
	Module Efficiency (%)	24.18%	24.50%	24.81%	25.13%	25.45%

DESIGN SPECIFICATIONS

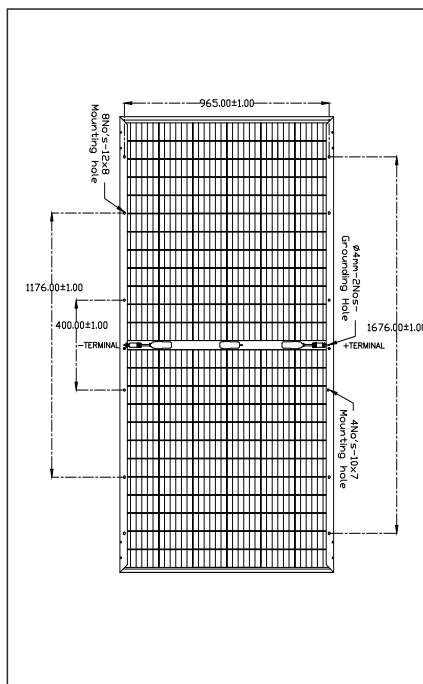

THERMAL CHARACTERISTICS

Temperature coefficient of Current (Isc), α (%/°C)	0.05
Temperature coefficient of Voltage (Voc), β (%/°C)	-0.27
Temperature coefficient of Power (Pm), γ (%/°C)	-0.37
NOCT (°C)	43 ± 2
Operating temperature range (°C)	-40 to 85

MECHANICAL CHARACTERISTICS

Length x Width x Thickness (L x W x T)	2029 mm (L) x 1007 mm (W) x 40 mm (T)
Weight	25.5 kgs
Solar Cells per Module (Units) / Arrangement	144 cells / (12x6 12x6)
Solar Cell	Mono PERC Bifacial
Front Glass	3.2 mm Low Iron and Tempered glass with ARC coating
Rear Cover	Transparent Backsheet
Encapsulate	PID Free & UV Resistant
Junction Box (Protection degree / Material)	IP68 / Weatherproof PPO
Cable & Connector (Protection degree / Type)	IP68 rated / MC4 compatible
Cable cross - section & Length	4 mm ² & 500mm
Frame	Anodized Aluminium Alloy

Waaree Energies Ltd. is amongst the top Solar Energy Companies and has the country's largest Solar PV Module manufacturing capacity of 2 GW. In addition, it is committed to provide top notch EPC services, project development, rooftop solutions, solar water pumps and also an Independent Power Producer. Waaree has its presence in over 325+ locations nationally and 68 countries globally.

10 Years Product Warranty • 25 Years Power Output Warranty

(^) FEW MODELS MAY BE UNDER CERTIFICATION

*If you need specific product certificates, and if module installations are to deviate from our guidance specified in our installation manual, please contact your local Waaree sales and technical representatives.

- The electrical data given here is for reference purpose only.
- Please confirm your exact requirements with the sales representative while placing your order.
- Refer installation Manual instructions & Waaree warranty statement for terms & conditions.
- Waaree Reserves the right to change the specifications without prior notice.z

www.waaree.com